

Product information and test conditions

Name

Time 2019-02-18 02:52:06(Time-zone GMT+8)

Manufacturer


User Waveform Lighting
(hello@waveformlighting.com)

Temperature(°C) Humidity(%) Distance(m)


Parameters

CIE_x	0.4371
CIE_y	0.4037
CIE_u'	0.2508
CIE_v'	0.5213
CCT	2994 K
CRI (Ra)(R1~R8)	98
CQS	98
TLCI(Qa)	97
GAI	58
TM-30-15 Rf	96
TM-30-15 Rg	100
Illuminance	9,331 lux
Foot Candle	866.9 fc
λ_p	623 nm
Flicker Percentage	0 %
Flicker Index	0.00
Flicker Frequency	165 Hz


Spectrum

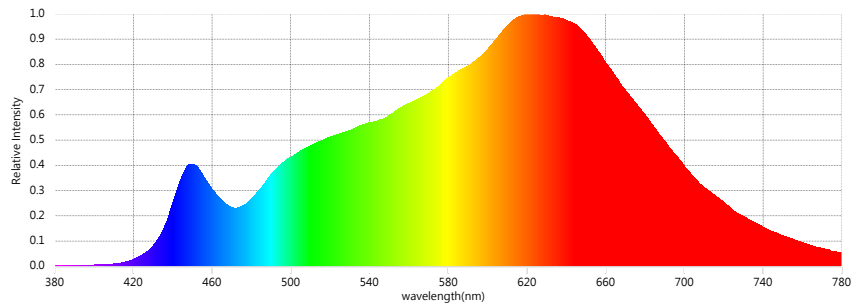


CIE 1931

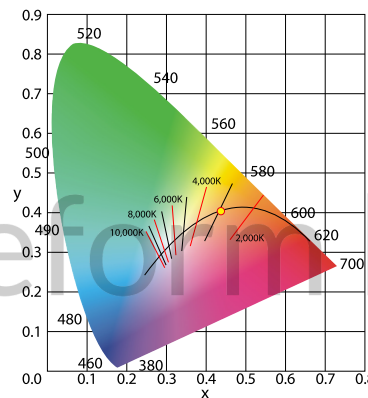


CIE 1976

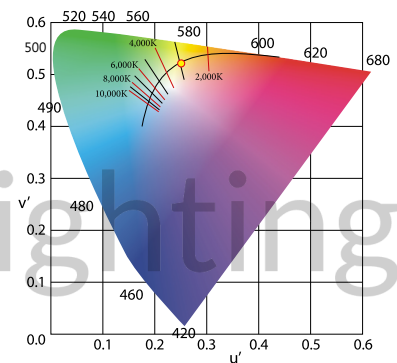

C78.377 - 2017

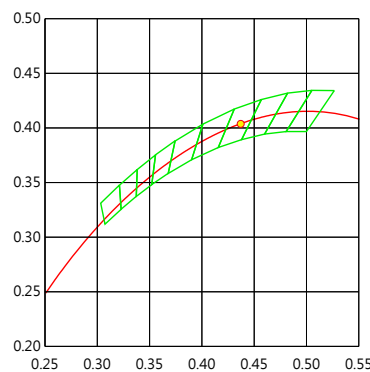

IEC-SDCM

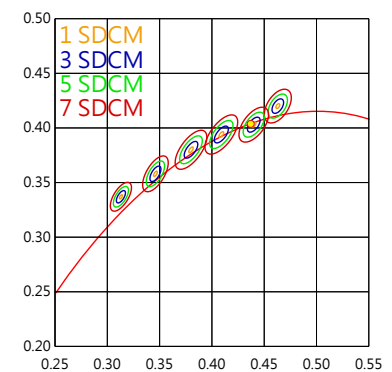

CRI (Re) (R1-R15)

R1	99	R6	97	R11	97
R2	100	R7	96	R12	93
R3	100	R8	91	R13	100
R4	99	R9	81	R14	99
R5	100	R10	100	R15	96

TM-30-15

